

DUST EXTRACTION & VACUUMS





Regularly **breathing construction dust** can cause **life-changing lung diseases** like Lung Cancer, asthma, Chronic Obstructive Pulmonary Disease (COPD)

Types of Construction Dust

- Silica dust from concrete, mortar and sandstone
- Wood dust from softwood, hardwood and wood-based products like MDF and plywood

Lower toxicity dusts from plasterboard, limestone, marble and dolomite

Common Construction Tasks Creating Dust

- Cutting paving blocks, kerbs and flags
- Chasing concrete and raking mortar
- Cutting roofing tiles
- Scrabbling or grinding
- Soft strip demolition
- Dry sweeping
- Cutting and sanding wood
- Sanding taped and covered plasterboard joints





ADVANTAGES OF USING ON-TOOL EXTRACTORS / VACUUMS

Saves time and money – packing away is quicker, allows getting home or moving on to the next job quicker



Better health & wellbeing – reduced risk of serious lung diseases





Reduced working days lost due to workplace illness



Used appropriately to meet legal requirements / no HSE fines for inefficient, wrong or no dust extraction





L Class ≤ 1.0% Dusts with maximum allowable concentrations (MAC) > 1 mg/m³

Soft woods and solid surface material (e.g. Corian)

Filters 99% of all air

<1% of extracted dust passes out of the filter



> M Class < 0.1% Dusts with maximum allowable concentrations (MAC) ≥ 0.1 mg/m³

For hard woods, board materials, concrete and brick dust

Filters 99.9%

<0.1% of extracted dust is passed out of the filter



➤ H Class < 0.005% Dusts with maximum allowable concentrations (MAC) < 0.1 mg/m³

Highly carcinogenic dusts, asbestos, formaldehyde, mould, germs and bacteria

Filters 99.995%

Releases <0.005% of dust back into the air





HEPA

Many people often mistake this for believing it to be a brand or manufacturer, and this is not true. It is important to note that HEPA is a type of air filter.

HEPA was commercialized in the 1950s, and the original term became a registered trademark and later a generic term for highly efficient filters.

HEPA stands for "High Efficiency Particulate Arresting"



HEPA

To qualify as a "True HEPA" an air filter must remove (from the air that passes through) 99.97% of particles that have a size of 0.3 microns in diameter.



Products that claim to be "HEPA-type", "HEPA-like", "HEPA-style" or "99% HEPA" do not satisfy these requirements and may not have been tested in independent laboratories






| HEPA | | | | |
|-----------------------------|--------------|--|--|--|
| Filter Class Efficiency (%) | | | | |
| E 10 | ≥ 85 | | | |
| E 11 | ≥ 95 | | | |
| E 12 | ≥ 99,5 | | | |
| H 13 | ≥ 99,95 | | | |
| H 14 ≥ 99,995 | | | | |
| U 15 ≥ 99,999 5 | | | | |
| U 16 | ≥ 99,999 95 | | | |
| U 17 | ≥ 99,999 995 | | | |

- HEPA = High Efficiency Particulate Absorber
- A generic term to describe a high efficiency filter
- Consists of a mat of randomly arranged fibreglass layers
- European Standard = EN 1822-1:2009
- The filter must remove 99.95% of particles that have a size greater than or equal to 0.3 microns (μm)



In 2007, DEWALT created the most comprehensive system in the world for tools dedicated to safety





CONTROL



VIBRATION



DUST



Guarantees the potential of inhaling dust is dramatically reduced to give a cleaner and safer working environment



DUST EXTRACTORS & VACUUMS PRODUCT HIERARCHY



| | SDS Plus | Drilling Dust | Chiselling Dust | Demolition | 18V | 18V Cordless | SDS-Plus | 18V XR | 18V XR | 30L | 38L | 11L |
|------------------------------------|----------------|---------------|------------------|------------|-----------------|------------------|------------------|------------|------------|--|-------------------------------------|------------------------|
| | Dust Extractor | Extraction | Extraction | Dust | Dust Box | SDS-Plus | Dust Extractor + | Hand Held | L-Class | Compact | Construction | 54V XR FLEXVOLT |
| | | System & | System | Extraction | Evacuator | Dust Extractor + | Dust Box | Wet & Dry | Vacuum & | L-Class | M -Class | M-Class |
| | | Hole Cleaning | | System | | Dust Box | Evacuator | Vaccum | Extractor | Dust Extractor | Dust Extractor | Dust Extractor |
| | | | | | | Evacuator | | | | | | |
| Product Code | DWH201D | DWH050 | DWH051 | DWH052 | DWH079D | D25303DH | D25304DH | DCV517 | DCV584L | DWV901L | DWV902M | DCV586M |
| Tool Holder / Hose Connection | SDS Plus | SDS Plus | SDS-Max/19mm HEX | Demolition | AirLock | SDS Plus | SDS Plus | _ | AirLock | AirLock | AirLock | AirLock |
| Class | | | | | | | | _ | L-Class | L-Class 💳 | M-Class | M-Class |
| Voltage | | | | | _ | 18V | | | 18V | 240V or 110V | 240V — | 54V |
| Power Input | | | | | | | | 180 Watts | 300 Watts | 1400 Watts | 1400 Watts | |
| | | | | | | | | | | 3000 Watts (240V) | 3000 Watts (240V) | |
| Max. Power | | | | | | | | | | 1840 Watts (110V) | 1840 Watts (110V) | |
| Variable Flow | | | | | | | | | | | Yes | |
| | | | | | | | | | | 68.0 l/sec (240V) | 68.0 l/sec (240V) | |
| Max. Airflow | | | | | | | | 15.9 l/sec | 15.9 l/sec | 64.0 l/sec (110V) | 64.0 l/sec (110V) | 24.7 l/sec |
| Tank Capacity | | | | | | | | 1.9L 🚤 | 7.5L | 30L | 38L | 11L |
| Wet/Dry Capacity | | | | | | | | 1.9L | 7.5L | 17.5L | 18.4L | 7.5L |
| Max. Drill Bit Diameter | 25mm | 52mm | | 32mm | | 16 mm 📥 | 26 mm | | | | | |
| Max. Drill Bit Length | 250mm | | | | | 160 mm | 250 mm | | | | | |
| Max. Drilling Depth | 129mm | Unlimited | Unlimited | Unlimited | | 105 mm | 180 mm | | | | | |
| Hose Length | 1000mm | | | | | 120 mm | | 1m 💳 | 2 m | 4.1 m | 4.1 m | 2.4m |
| Hose Diameter | 30mm | 30mm | 30mm | 30mm | | 30 mm | _ | 32 mm | 32 mm | 32 mm | 32 mm | 32mm |
| IP Rating | | | | | | | | IPX4 | IPX4 | IPX4 | IPX4 | |
| Sound Pressure | | | | | | | | 76 dB(A) | 76 dB(A) | 80 dB(A) | 75 dB(A) == | 69 dB(A) |
| Sound Pressure Uncertainty | | | | | | | | 3 dB(A) | 3 dB(A) | 3 dB(A) | 3 dB(A) | 3.5 dB(A) |
| Sound Power | | | | | | | | 87 dB(A) | 87 dB(A) | 93 dB(A) (240V) — 94 dB(A) (110V) | 88 dB(A) | 81.5 dB(A) |
| Sound Power Uncertainty | | | | | | | | 3 dB(A) | 3 dB(A) | 3 dB(A) | 3 dB(A) | 3.5 dB(A) |
| Dimensions (Height, Length, Width) | 2E6v12Ev126 | | | | 1E2v210v126~~~ | 242x340x116mm | 206v440v126 | ` ' | | · , | 3 UB(A) | 3.5 UB(A) |
| Weight | 1.068Kg | | | | 0.492Kg | | | | | Height 500mm 9.5Kg | 15/0 | 6.5Kg |
| weight | 1.009VR | | | | U.49ZNg | 1.4Kg | 1.4Kg | 1.8Kg | 4.8Kg | | 15Kg DWV902M-GB (240V) | DCV586MT2-GB (2 x 6Ah) |
| Product Code | DWH201D-XJ | DWH050-XJ | DWH051-XJ | DWH052-XJ | DWH079D-XJ | D25303DH-XJ | D25304DH-XJ | DCV517N-XJ | DCV584L-GB | DWV901L-GB (240V) DWV901L-LX (110V) | DWV902M-GB (240V) DWV902M-LX (110V) | DCV586MN-XJ (Bare) |




DUST EXTRACTION SYSTEMS

Users

Any trade requiring dust management solutions

- Construction site workers
- **Plumbers**
- Electricians
- General builders
- General contractors
- Flooring contractors
- **Dryliners**





Applications



Bushing Points Flats







Chipping / Demolition







Many more...





Legislation Compliance

- Reduces airborne dust
- Encouraged on site
- DEWALT leading dust reduction

Health & Safety

- Reduces site 'dust prevention' costs
- Combats Silicosis & other dust related diseases

Compatibility

- All DEWALT 5, 6, 7, 9, 10, 12, 16 & 30 Kg's
- Innovative extractor connectivity

Drilling & Chipping Solution

- Total large hammer solution
- All common applications covered
- Accepts most drill bits and chisels

DRILLING DUST EXTRACTION SYSTEM & HOLE CLEANING



DWH050





DEMOLITION HAMMER DUST EXTRACTION







DWH051

5-12Kg

DWH052

16-30Kg

- ✓ Complete Solution
- **✓** Excellent Connectivity
- ✓ Durability




SDS PLUS DUST EXTRACTOR

DWH201D


Replaces D25301D

Sleeve Fits DEWALT SDS-Plus Hammers (18V, 54V & Corded) Plus **Premium Drills**

For system compatibility Versatility



Enhances control

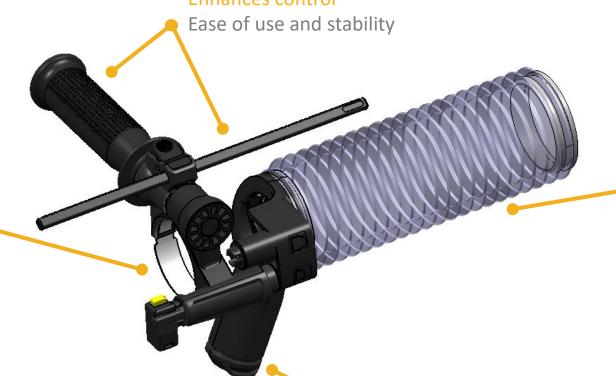

250mm Or 160mm Sleeves

For use with long bits or short bits for various applications Versatility

| | Result |
|-------------------------|--------|
| Max. Drill Bit Diameter | 25mm |
| Max. Drill Bit Length | 250mm |
| Max. Drilling Depth | 129mm |
| Max. Chisel Diameter | 25mm |
| Hose Length | 1000mm |
| Hose Diameter | 30mm |



Use With Airlock Hose Or Without Using Plug

Connects to DEWALT Extractors for system compatibility or use as a standalone collector Versatility

160MM, 250MM **SLEEVES & 150MM HOSE INCLUDED**



SDS PLUS DUST EXTRACTOR

DWH201D-XJ

- Collects dust and debris during drilling. Can be used with a dust extractor for complete dust collection, or alone as a collector
- Quick-fit system for easy tool free assembly and release
- For use with DEWALT corded and cordless SDS-Plus hammers
- Ideal for dust free drilling up to 25mm diameter
- Tough and versatile to meet the needs of the most demanding applications with a compact design to maintain visibility and extremely light weight to minimise user fatigue
- 1000mm heavy duty rubber hose for maximum reach
- Side handle adaptor for increased compatibility and depth rod for ease of use
- Includes side handle with dust extraction adaption, rubber hose, 250mm long and 160mm short accordion collectors.
 Packaged in a cardboard branded box







SDS PLUS DUST BOX EVACUATOR





DWH079D



and

Included FOC in D25303DH 18V Cordless Dust Extraction System



Included FOC in D25304DH SDS Plus Dust Extractor **Corded Cordless**

Listed separately in the price list



SDS PLUS DUST BOX EVACUATOR

DWH079D



Reverse Airflow*

Empties dust box in <30s
For reduced downtime

Ergonomic Design*


Sits flatly on DEWALT extractors

Compatibility

Compatible With SDS-Plus Dust Boxes
In D25303DH And D25304DH Integrated Extractors



Simple to attach and Evacuate in 3 steps



AIRLOCK Connection*

Dust managementSafety

Available boxed on it's own **or** included **free of charge**, boxed separately, with D25303DH & D25304DH SDS Plus Extraction Units



Reduces dust, increased safety

Dust Box from Dust Excavator DWH079D D25304DH





Or other Airlock dust collection system



SDS-PLUS DUST EXTRACTOR


18V CORDLESS SDS-PLUS DUST EXTRACTOR



D25304DH



D25303DH

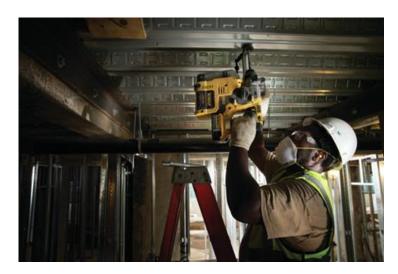





SDS-PLUS DUST EXTRACTOR

D25304DH

PERFORM PROTECT

HEPA Filter*

Captures 99.5% of particles 0.3 microns or larger

Excellent worker protection and washable to enhance lifetime

Manual

Filter Cleaning Mechanism

Excellent worker protection

Safer environment

Retrofitable For D25303DH

One solution Compatibility

| | Result |
|-------------------------|--------|
| Max. Drill Bit Diameter | 26mm |
| Max. Drill Bit Length | 250mm |
| Max. Drilling Depth | 180mm |

Fits Up To 26mm Bits*

Compatibility for various applications whilst maintaining excellent suction



180mm
Max Drilling
Depth*

Deep drilling
For various
applications

DEWALT DEWALT

No Motor, Powered By Hammer*

Works by a mechanical drive that activates the extractor

Reduced weight

Fits DCH333, DCH334 (54V XR FLEXVOLT) And D25333K, D25334K 3Kg Corded Hammers*

One solution Versatility

Tool Free For Assembly

Quick and easy attachment Saves time

DWH079D
DUST EVACUATOR
INCLUDED IN A
SEPARATE BOX





18V CORDLESS SDS-PLUS DUST EXTRACTOR

D25303DH

HEPA Filter*

Captures 99.5% of particles 0.3 microns or larger

Excellent worker protection and washable to enhance lifetime

Manual

Filter Cleaning Mechanism

Excellent worker protection

Safer environment

Retrofitable For D25303DH

One solution Compatibility

| | Result |
|-------------------------|--------|
| Max. Drill Bit Diameter | 16mm |
| Max. Drill Bit Length | 250mm |
| Max. Drilling Depth | 160mm |

Fits Up To 16mm Bits*

For various applications whilst maintaining excellent suction

High performance drilling

Fits DCH273, DCH274, DCH253 (Type 2), DCH254 (Type 2) (18V XR 2KG SDS PLUS Hammers)*

One solution Versatility



Depth

For various applications

Versatility

POWERED BY MOTOR*

Offers excellent suction High performance drilling

Tool Free For Assembly

Quick and easy attachment Saves time

DWH079D DUST EVACUATOR INCLUDED IN A SEPARATE BOX





18V XR HANDHELD VACUUM

DCV517

On-Board Hose Storage*

For easy transport and storage

Convenience and safe



Single Latch*

For easy tank removal

Quick and easy emptying of the tank

Washable Filter*

Captures 99.7% of particles 0.3 microns or larger

Excellent worker protection and washable to enhance lifetime

Toggle On/Off Switch Convenient

Ease of use

Detachable Flexible Hose

To get into difficult to reach areas

Ease of use

| | Result |
|----------------------------|------------|
| Power Input | 180 Watts |
| Max. Airflow | 15.9 l/sec |
| Tank Capacity | 1.9L |
| Wet/Dry Capacity | 1.9L |
| Hose Length | 1m |
| Hose Diameter | 32 mm |
| IP Rating | IPX4 |
| Sound Pressure | 76 dB(A) |
| Sound Pressure Uncertainty | 3 dB(A) |
| Sound Power | 87 dB(A) |
| Sound Power Uncertainty | 3 dB(A) |



Compatible With 14V/18V & 54V FLEXVOLT XR Batteries*

System compatibility and mains supply Versatility

Wet / Dry Vacuum*

Without changing the filter Versatility



18V XR HANDHELD VACUUM

DCV584L-GB

- Runs off 18V XR battery platform allowing quick and easy change between different tools with a single
- The rubber hose is extendable to 1 metre for added flexibilty for a wide range of applications
- 1.9 Litre tank capacity allows for the cleaning up of larger amounts of material
- High efficiency filter traps 99.7% of dust as small as drywall and cement dust
- Single latch tank removal allows for quick and easy emptying of the tank
- Includes wide nozzle, 1 metre hose and crevice tool. Boxed in branded cardboard packaging









18V XR L-CLASS VACUUM/DUST EXTRACTOR

DCV584L



Replaces DCV582

Compatible With 14V/18V & 54V FLEXVOLT XR Batteries*

System compatibility and mains supply Versatility

| | Result |
|--------------------------------------|------------|
| Tool Holder / Hose Connection | AirLock |
| Class | L-Class |
| Voltage | 18V |
| Power Input | 300 Watts |
| Max. Airflow | 15.9 l/sec |
| Tank Capacity | 7.5L |
| Wet/Dry Capacity | 7.5L |
| Hose Length | 2 m |
| Hose Diameter | 32 mm |
| IP Rating | IPX4 |
| Sound Pressure | 76 dB(A) |
| Sound Pressure Uncertainty | 3 dB(A) |
| Sound Power | 87 dB(A) |
| Sound Power Uncertainty | 3 dB(A) |

AIRLOCKTM Compatible*

Allows direct, secure attachment

DEWALT AirLockTM tools



On-Board Hose Storage*

For easy transport and storage Convenience and safe

Wet / Dry Vacuum*

Without changing the filter Versatility

AIR

On-Board Accessory & Mains Cord Storage*

For easy transport and storage Convenience and safe

L-Class Vacuum*

High efficiency filtration
Safer environment

Blower Function

For tool and job area dust and debris cleaning option Multi-use

HEPA Filter*

Captures 99.5% of particles 0.3 microns or larger

Excellent worker protection and washable to enhance lifetime





18V XR L-CLASS VACUUM/DUST EXTRACTOR

DCV584L-GB

- Operates on 14.4V / 18V and 54V FLEXVOLT XR battery packs plus runs on a 240V mains supply
- L–Class vacuum offers high efficiency filtration for safer environment
- High efficiency washable HEPA filter traps 99.97% of dust as fine as 0.3 Microns
- On-board hose, cord and accessory storage provides convenient transport and storage
- Versatile on the jobsite, vacuums wet or dry without the need to change the filter
- Use as an extractor by attaching to tools with hose and AIRLOCK accessories
- Includes wide nozzle, 2 metre hose, crevice tool. Boxed in branded cardboard packaging









30L COMPACT DUST EXTRACTOR L-CLASS

DWV901L

240V OR 110V

Constant Suction Control

Excellent for fine concrete and wood dust

Versatility

Automatic Start & Stop Control (Continues to run for 15 seconds)

Activates when power tool is operated Saves power, reduces jobsite noise

Audible Alarm*

Alerts user of a drop in performance Optimizes performance

| | Result |
|-------------------------------|-------------------|
| Product Code | DWV901L |
| Tool Holder / Hose Connection | AirLock |
| Class | L-Class |
| Voltage | 240V or 110V |
| Power Input | 1400 Watts |
| | 3000 Watts (240V) |
| Max. Power | 1840 Watts (110V) |
| | 68.0 l/sec (240V) |
| Max. Airflow | 64.0 l/sec (110V) |
| Tank Capacity | 30L |
| Wet/Dry Capacity | 17.5L |
| Hose Length | 4.1 m |
| Hose Diameter | 32 mm |
| IP Rating | IPX4 |
| Sound Pressure | 80 dB(A) |
| Sound Pressure Uncertainty | 3 dB(A) |
| | 93 dB(A) (240V) |
| Sound Power | 94 dB(A) (110V) |
| Sound Power Uncertainty | 3 dB(A) |



Power Take Off Socket

Automatic switching of the vacuum system

Wet / Dry Vacuum* Without changing the filter Versatility

L-Class Vacuum*

High efficiency filtration Safer environment

Innovative Dual Filter Cleaning (Cleaned Every 30 Seconds)*

Reduces filter clogging, delivers constant air flow Maintains performance

AIRLOCK[™] Compatible*



Allows direct, secure attachment to DEWALT AirLockTM tools

System compatibility





30L COMPACT DUST EXTRACTOR L-CLASS (240V) or 30L COMPACT DUST EXTRACTOR L-CLASS (110V)

DWV901L-GB

DWV901L-LX

- Automatic start and stop control when the power tool is operated. The machine continues to run for an extra 15 seconds to allow all dust to be cleared from system
- Wet and dry pick up
- Durable tank construction suitable for tough jobsite applications
- Built-in power take off socket allows power tool connection for automatic switching of the vacuum system
- Constant suction power even with the finest concrete and wood dust
- L Classified to meet EU legislation
- Innovative dual filter cleaning system maintains performance during tough construction applications dust
- A filter is automatically cleaned every 30 seconds reducing filter clogging and delivering constant air flow
- Includes dust bag, 4m x 32mm extraction hose, 35mm AirLock adapter. Boxed in branded cardboard packaging



DWV901L-GB

Barcode:

5035048467411

DWV901L-LX

Barcode:

5035048467428





38L CONSTRUCTION DUST EXTRACTOR M-CLASS

DWV902M

240V OR 110V



Versatility

Automatic Start & Stop Control (Continues to run for 15 seconds)

Activates when power tool is operated Saves power, reduces jobsite noise

Audible Alarm*

Alerts user of a drop in performance Optimizes performance

| 1400 Watts |
|------------------------|
| 3600/3000 Watts (240V) |
| 1840 Watts (110V) |
| Yes |
| 68 l/sec (240V) |
| 64 l/sec (110V) |
| 38L |
| 18.4L |
| 4.1 m |
| 32 mm |
| IPX4 |
| 75 dB(A) |
| 3 dB(A) |
| 88 dB(A) |
| 3 dB(A) |
| |



Telescoping handle

Easy transportation over jobsite Convenience

M-Class Vacuum*

High efficiency filtration Site compliant Safer environment

Innovative Dual Filter Cleaning (Cleaned Every 30 Seconds)*

Reduces filter clogging, delivers constant air flow Maintains performance

AIRLOCKTM Compatible*

Allows direct, secure attachment to DEWALT AirLockTM tools

AIR

System compatibility

Large Rear Wheels*

Easy transportation over jobsite

Convenience



vacuum system

Wet / Dry Vacuum*

DEWALT

Without changing the filter Versatility





DUST EXTRACTOR STORAGE & ACCESSORIES

DWV9500-XJ TSTAK VAC RACK ADAPTER



Adapter allows TSTAK Kit Boxes to connect with DWV901L and DWV902M **Dust Extractors**

Barcode: 5035048467480

T-STAK® **System Compatible** Compatibility **Across Dewalt Storage**

DWV9400-XJ

PLASTIC TANK LINERS (5 PACK)

DWV9401-XJ

PAPER DUST BAGS FOR DWV902 (5 PACK)

DWV9402-XJ

FLEECE DUST BAGS FOR DWV902 (5 PACK)



• 5 Filter Bags for D27901/ D27902

• 5 Filter Bags for D27901/ D27902

• 5 Filter Bags for D27901/ D27902

DWV9340-XJ

REPLACEMENT FILTER FOR DWV902M TYPE 2 & DWV900L (2 PACK)



- Replacement Filter for DWV902M Type 2 & DWV900L
- 2 pack
- · For wet and dry use

Barcode:

5035048696712

Barcode:

5035048434444

Barcode:

5035048434451

DEWALT 1 Year Guarantee

Barcode:

5035048434468



54V XR FLEXVOLT M-CLASS DUST EXTRACTOR

overload protection

Increased performance

DCV586M



TSTAK® Compatible*

Configure to exact storage requirements

Ease of use, enhanced mobility, saves time

4mm Reinforced Polypropylene Plastic

High impact, drop resistant

Increased durability, jobsite tough

Heavy Duty Metal Clips

Access to Tank & Filters Quick and Easy

Wet & Dry*

Maximum clean up flexibility Versatility

| | Result |
|--------------|-----------|
| Capacity | 11L |
| Filter Clean | Automatic |
| Hose Length | 2.4m |

Automatic Dual Filter Cleaning* (Filter cleaned every 30 seconds)

Reduces filter clogging, delivers constant airflow

Maintains performance

Dust Tight, Water Resistant*

Maximum protection against severe conditions

Increased durability

Durable Recessed Carry Handle

On Vac 2.4m Hose Storage*

Protective hose storage

Fase of use and safe

Increased portability

Saves time

Wireless Vac Activation Remote/Key Fob Activation*



No need to switch on at source Ease of use, saves time

2000W Brushless Motor*

Powerful and market leading

Audible Alarm*

Alerts user of a drop in performance Optimizes performance

M-Class Compliant*

< 0.1% dust escape through filter, suitable for use on construction sites Increased performance

Recessed Battery Crevice Fits XR FLEXVOLT Batteries*


Maximum battery protection. Maximum power and runtime

Extended durability, efficiency and power



54V XR FLEXVOLT M-CLASS DUST EXTRACTOR REMOTE / KEY FOB ACTIVATION

- Insert key fob into holder
- Wrap strap around
- Strap to vacuum hose, finger or close by the work area
- Press to activate/deactivate

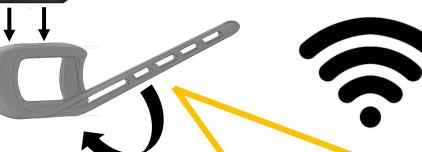





Video of key fob in use

Wireless Vac
Activation
No need to switch on
at source







54V XR FLEXVOLT M-CLASS DUST EXTRACTOR **STORAGE & ACCESSORIES**



T-STAK® **System Compatible** Compatibility **Across Dewalt Storage**

DWV9316-XJ

Antistatic Dust Extractor Hose 4M

DCV9401-XJ

Paper Bags For DCV586M Dust Extractor (5 Pack)

DCV9402-XJ

Fleece Bags For DCV586M **Dust Extractor (5 Pack)**



• Replacement fleece bags for DV586M Dust Extractor (5 Pack)

Barcode:

5035048696743

DCV5861-XJ

M-Class Filters For DCV586M Dust Extractor (Set of 2)



- M-Class Certified to meet EU legislation
- HEPA Certified
- Can be Used in Wet & Dry **Applications**

Barcode:

5035048696712



- 4M x 35MM Antistatic **Extractor Hose**
- Fits DCV586M, DWV901L & DWV902M

Barcode:

5035048434437

• Replacement paper bags for DCV589M Dust Extractor (5 Pack)

Barcode:

5035048696736



54V XR FLEXVOLT M-CLASS DUST EXTRACTOR - 2 X 6AH

DCV586MT2-GB



- 2000W Brushless Motor provides powerful and market leading overload protection for increased performance
- Wireless vac activation by a remote key fob so there is no need to switch on at source for ease of use and saves time
- Audible Alarm alerts user of a drop in performance
- M-Class Compliant, < 0.1% dust escape through filter, suitable for use on construction sites
- TSTAK® Compatible configure to exact storage requirements for ease of use, enhanced mobility, saving time
- Automatic dual filter cleaning filter cleaned every 30 seconds, reduces filter clogging delivering constant air flow
- Recessed Battery Crevice provides maximum battery protection
- Wet and dry for maximum clean up flexibility and on vac 2.4m hose storage for ease of use
- Dust tight and water resistant for maximum protection against severe conditions, giving increased durability
- Heavy duty metal clips to quick and easy access to tank & filters
- 4mm reinforced polypropylene plastic provides high impact, drop resistant for increased durability
- Includes DCB118 fast battery charger, 2 x DCB546 6Ah/2Ah batteries, 2.4m x 32m extraction hose, 3mm AirLock adapter, stepped rubber AirLock adapter, remote fob and strap, fleece dust bag. Boxed in branded cardboard packaging















AIRLOCK DUST CONNECTION SYSTEMS

DWV9210-XJ

AIRLOCK DUST CONNECTION SYSTEM
CONSTRUCTION KIT



- Twist lock action enables user to quickly move hose from tool to tool whilst retaining positive lock
- Swivels 360 degrees to prevent hose becoming twisted during use

Barcode:

5035048359631

DWV9220-XJ

AIRLOCK DUST CONNECTION SYSTEM
WOODWORKING KIT



- Direct locking to compatible DEWALT tools
- Twist lock action enables user to quickly move hose from tool to tool whilst retaining positive lock
- Swivels 360 degrees to prevent hose becoming twisted during use

Barcode:

5035048359655

DWV9000-XJ

AIRLOCK DUST CONNECTION SYSTEM MAIN CONNECTOR



- Screws directly to 35mm hose. Compatible with DEWALT and other extraction units
- Direct locking to compatible DEWALT tools
- Swivels 360 degree to prevent hose becoming twisted during use
- Twist lock action enables user to quickly move hose from tool to tool whilst retaining positive lock

Barcode:

5035048359679

DWV9110-XJ

AIRLOCK DUST CONNECTION SYSTEM TAPERED RUBBER ADAPTER



- Fits with the DWV9000 AirLock connector for quick and easy dust port connection
- Tapered rubber adapter fits tools with 29, 30 and 35mm ID ports
- Swivels 360 degrees to prevent hose becoming twisted during use

Barcode:

5035048363249

DWV9120-XJ

AIRLOCK DUST CONNECTION SYSTEM
STEPPED ADAPTER



- Swivels 360 degrees to prevent hose becoming twisted during use
- Stepped rubber adapter adds flexibility to system.
- Fits 35 and 38mm ID ports

Barcode:

5035048359716

DWV9130-XJ

AIRLOCK DUST CONNECTION SYSTEM 35MM ADAPTER



- Swivels 360 degrees to prevent hose becoming twisted during use
- 35mm OD adapter fits tools with 35mm ID port

Barcode:

5035048359693

DWV9150-XJ

AIRLOCK DUST CONNECTION SYSTEM 35MM ANGLE ADAPTER



- Can be used as a handle in conjunction with floor cleaning kit
- Angle allows user to position hose away from tool
- 35mm Angle adapter fits tools with 35mm ID port
- Swivels 360 degrees to prevent hose becoming twisted during use



FLOOR CLEANING KIT FOR DUST EXTRACTORS

DCV9350-XJ


- Fits DWV901L and DWV902M dust extractors
- Metal Tubes for added durability
- Includes AirLock Adapter for direct connection to vacuums

Brush **Extensions** Rubber Squeegees **Crevice Tool** Floor Sweeper

DEWALT 1 Year Guarantee



STANLEY BLACK & DECKER TRAINING COURSE

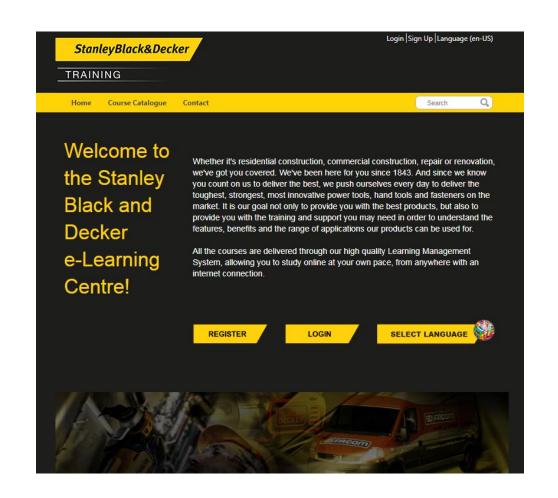



https://go.bluevolt.com/SBD/Home

Available Now!



To the best of our knowledge, all descriptions, illustrations, specifications in this presentation are correct at the time of publishing. We cannot however be held liable for any inaccuracies of description, illustrations, specifications and reserve the right to change without notification. DEWALT_® is a registered trademark of Stanley Black & Decker